

Quick Guide

How to update the INOR USB-Interface



Step 1

Download the latest firmware for the USB-Interface from the link below and extract the zip-file.

<http://inor.com/download/software/>

ConSoft 3.2

ConSoft 3 supports ICON USB interface version 1.2.01 or higher.
To get the maximum functionality of ConSoft 3.2 it is recommended to use USB interface Version 1.2.07.

When installing ConSoft 3 it is recommended to also install the latest versions of Ipro, MiniPAQSoft and ProfiSoft. This can easily be done by clicking on "Options" when the first installation window pops up and then tick the selected program. In the table "Softwares when using the IPRO-X Interface (RS232 cable)" you can see what software supports which transmitter.

In the installation guide for ConSoft 3 you can find a more detailed description on how to install the software.

- ConSoftSetup
- DTM Setup INOR IPAQ 520 1.2.7 HART
- Hart Dd-Files C520 RegisteredVersions
- Quick Installation Guide - ConSoft 3 EN
- USB-Interface**

Step 2


Connect the USB-interface to the computer.

NOTE! No transmitter should be connected to the USB-interface during the update.




Step 3

Open ConSoft and close the “Select an option” window.

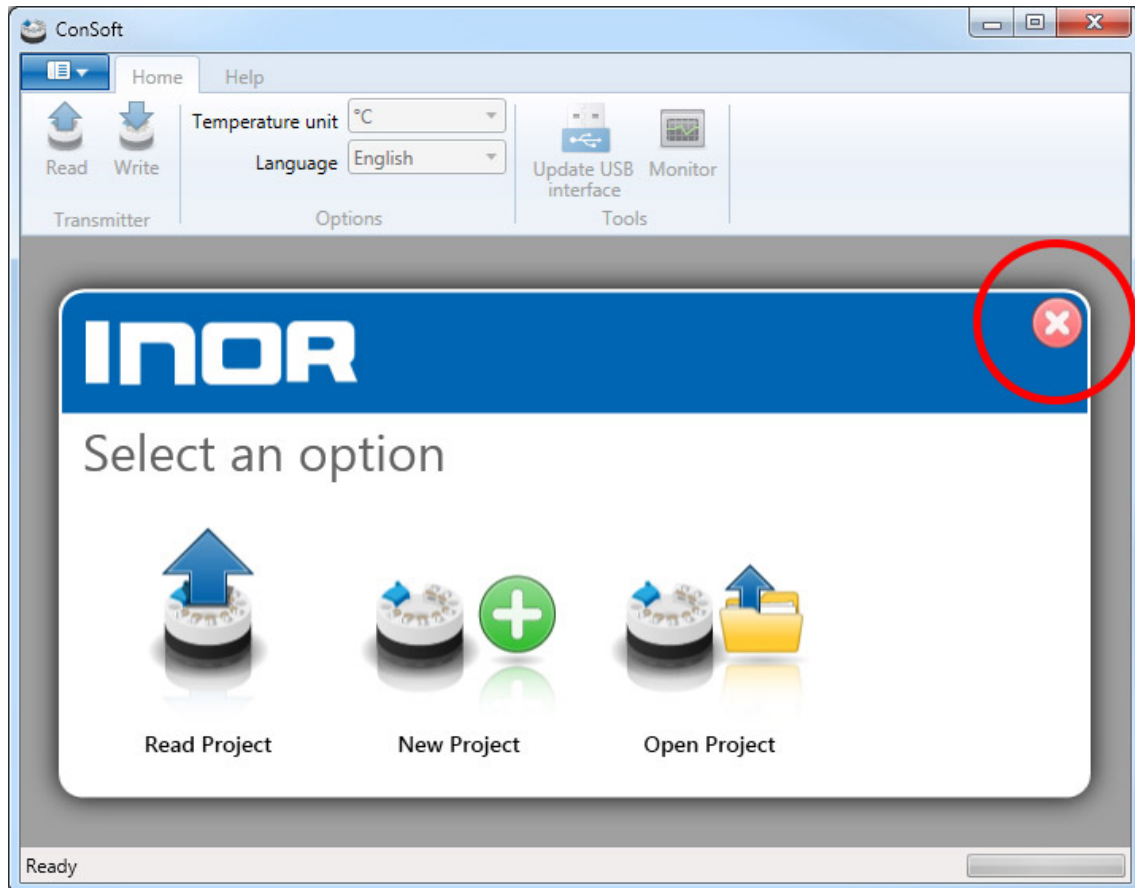


Step 4

Click on the icon “Update USB interface”.

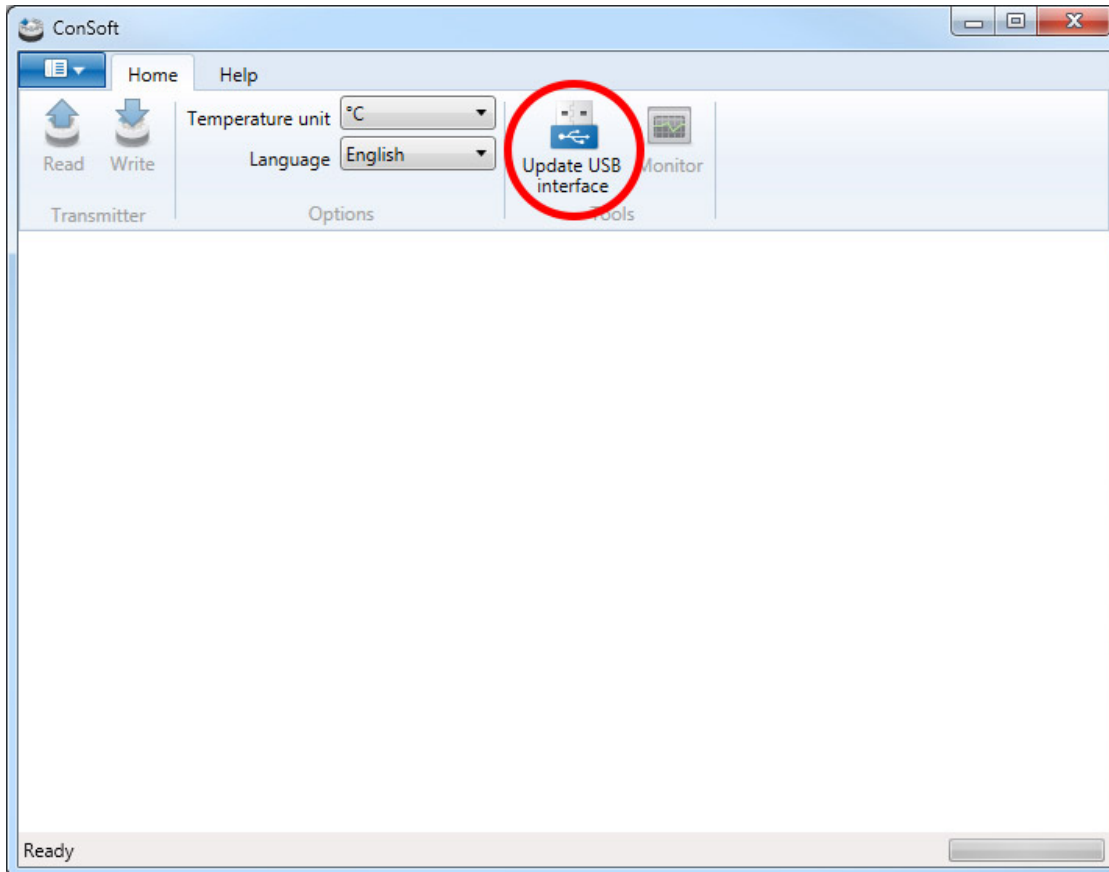


Step 5

Click on “Load file”.

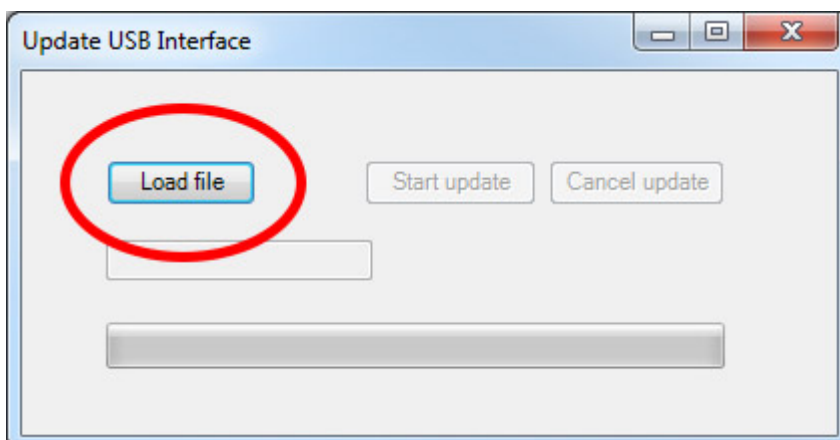


Step 6

Select the hex-file you have downloaded and click on “Open”.

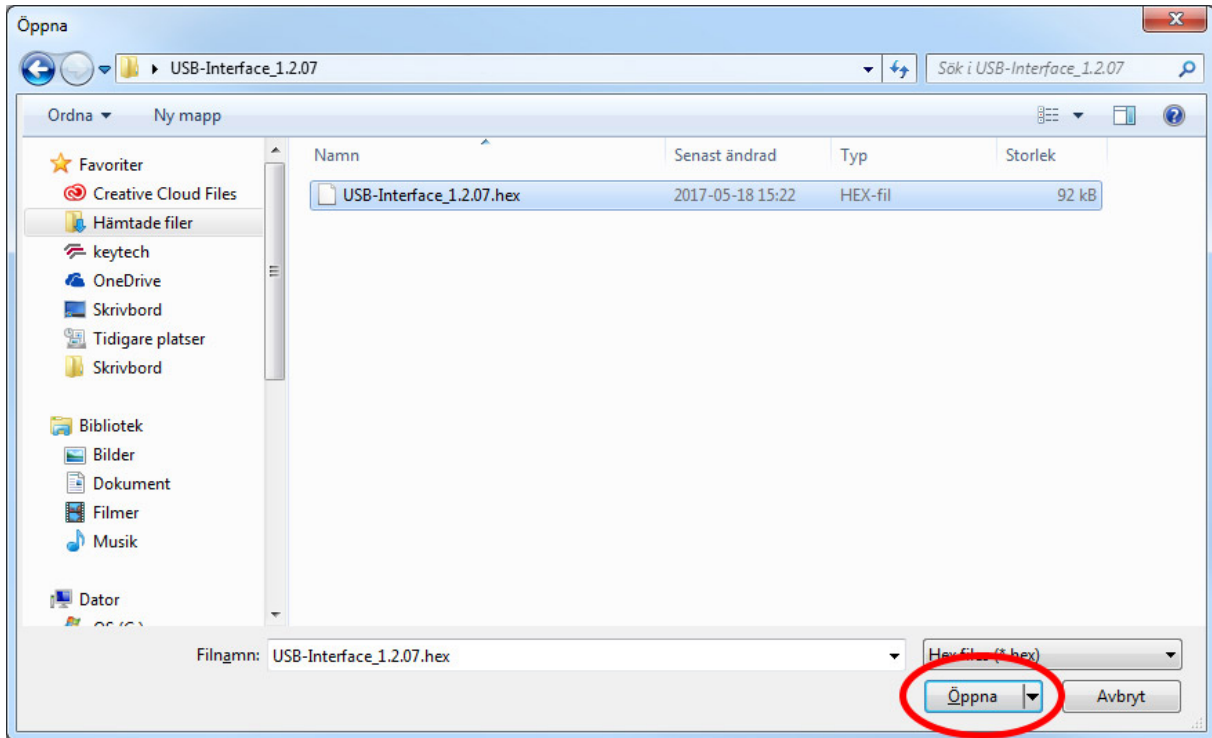

Step 7

Click on “Start update”.

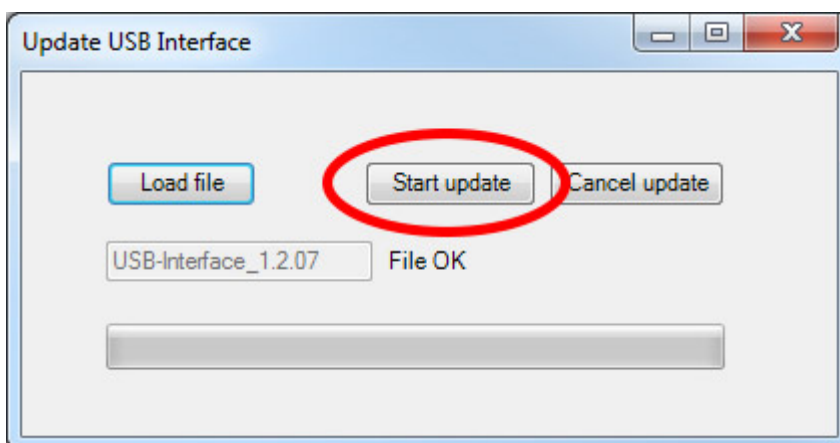

Step 8

When the update of the USB interface is completed, you can close the window. The USB Interface has now been updated and is ready for use.

